


## Настройка Power King Triple (Режим динамического получения IP адресов)


1. Подключаем Power King к компьютеру, открываем браузер и переходим по адресу 10.10.10.254



2. Вводим логин и пароль, по умолчанию логин admin, пароль admin

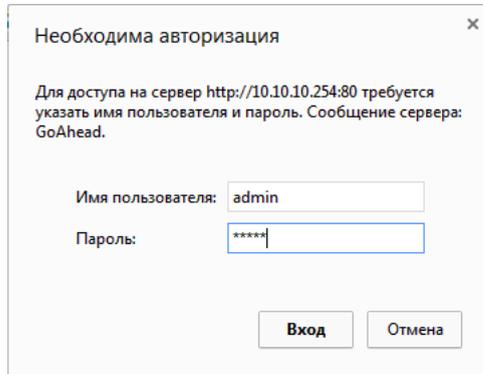

3. Во вкладке Operation Mode ничего не трогаем.

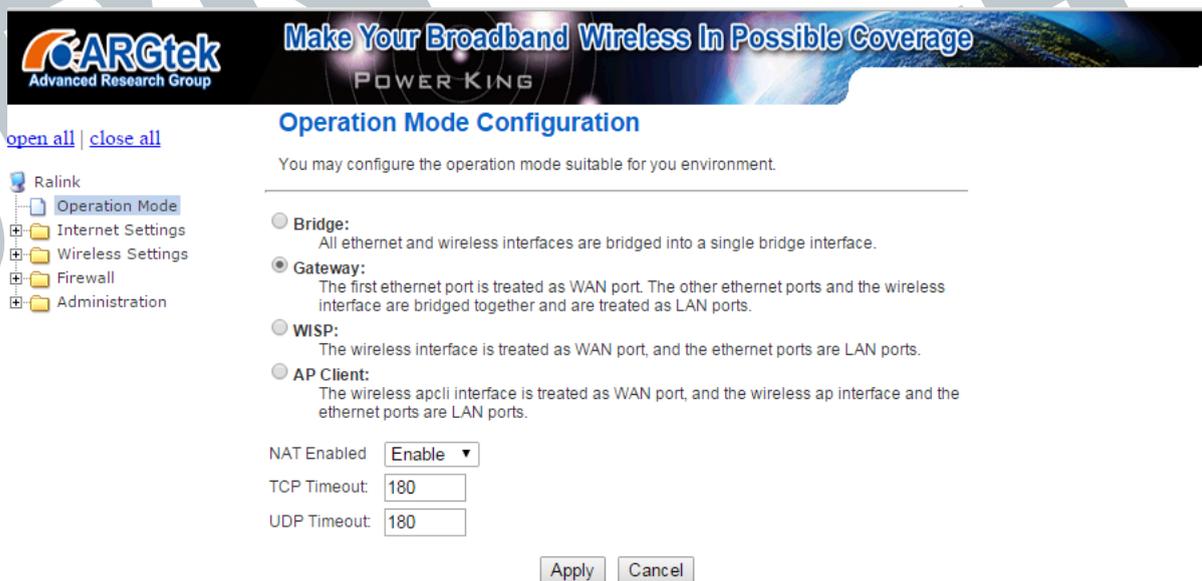

4. Во вкладке Wireless Settings -> Basic, в пункте Network Name(SSID), пишем название нашей сети.

[open all](#) | [close all](#)

- Ralink
  - Operation Mode
  - Internet Settings
  - Wireless Settings
    - Basic
    - Advanced
    - Security
    - WDS
    - WPS
    - Station List
    - Statistics
  - Firewall
  - Administration

### Basic Wireless Settings

You could configure the minimum number of Wireless settings for communication, such as Network Name (SSID) and Channel. The Access Point can be set simply with only the minimum setting items.

Wireless Network	
Radio On/Off	RADIO OFF
WiFi On/Off	WiFi OFF
Network Mode	11b/g/n mixed mode ▼
Network Name(SSID)	ARGtek <input type="checkbox"/> Hidden <input type="checkbox"/> Isolated
Multiple SSID1	<input type="text"/> <input type="checkbox"/> Hidden <input type="checkbox"/> Isolated
Multiple SSID2	<input type="text"/> <input type="checkbox"/> Hidden <input type="checkbox"/> Isolated
Multiple SSID3	<input type="text"/> <input type="checkbox"/> Hidden <input type="checkbox"/> Isolated
Multiple SSID4	<input type="text"/> <input type="checkbox"/> Hidden <input type="checkbox"/> Isolated
Multiple SSID5	<input type="text"/> <input type="checkbox"/> Hidden <input type="checkbox"/> Isolated
Multiple SSID6	<input type="text"/> <input type="checkbox"/> Hidden <input type="checkbox"/> Isolated

5. Во вкладке Wireless Settings -> Security, устанавливаем значения

Security Mode - WPA2-PSK,  
WPA Algorithms - TKIP ,  
Pass Phrase - Ваш пароль.

[open all](#) | [close all](#)

- Ralink
  - Operation Mode
  - Internet Settings
  - Wireless Settings
    - Basic
    - Advanced
    - Security
    - WDS
    - WPS
    - Station List
    - Statistics
  - Firewall
  - Administration

### Wireless Security/Encryption Settings

Setup the wireless security and encryption to prevent from unauthorized access and monitoring.

Select SSID	
SSID choice	ARGtek ▼
"ARGtek"	
Security Mode	WPA2-PSK ▼
WPA	
WPA Algorithms	<input checked="" type="radio"/> TKIP <input type="radio"/> AES <input type="radio"/> TKIPAES
Pass Phrase	12345678
Key Renewal Interval	3600 seconds (0 ~ 4194303)
Access Policy	
Policy	Disable ▼
Add a station Mac:	<input type="text"/>

На этом настройка окончена, не забывайте сохранять все изменения.